Technical Data Sheet

# DS-RVP003-RMR-004-2424-4

## 2W ◊ Unregulated Isolated Output ◊ 1:1 Input

RECOM
DC/DC Converter

## FEATURES

- Isolation voltage 3kVDC/min
- Operating temperature: -40°C to +85°C
- Short circuit protection
- Castellated connections



Dimensions (LxWxH): 25.4x15.24 x4.8 mm (1.0 x 0.6 x 0.19 inch)
1.40g (0.003lbs)

## DESCRIPTION

This scheme is composed of RVP003 and the matching transformer RMR-004. Combined with necessary rectifier diodes and resistive-capacitive components, it realizes a 24V ± 10% input and 24V/83mA output isolated non-stabilized power supply. The primary and secondary side isolation withstand voltage is not less than 3000VDC. It can provide long-term short-circuit protection and self-recovery. It is mainly applied in distributed power supply systems on circuit boards where a set of power supply needs to be generated to achieve safety and anti-interference by isolating from the input.

## SELECTION GUIDE

| Part Number | Input Voltage [VDC] | Output Voltage [VDC] | Output Current max. [mA] | Efficiency typ. [%] | max. Capacitive[1] [µF] |
|---|---|---|---|---|---|
| DS-RVP003-RMR-004-2424-4 | 24 | 24 | 83 | 91 | 1000 |

Note 1: Max. capacitive load is tested at nominal input voltage and full load


## BASIC CHARACTERISTIC (measured @ $T_{AMB}$= 25°C, nominal Input and full load after warm-up time unless otherwise noted)

| Parameter | Condition | Min. | Typ. | Max. |
|---|---|---|---|---|
| Input Voltage Range | nom.$V_{IN}$=24V ±10% | 21.6VDC | 24VDC | 26.4VDC |
| Minimum Load | | 0% | | |
| Internal Operating Frequency | | | 250kHz | |
| Output Ripple and Noise | 20MHz BW | | | 100mVp-p |


copyright © RECOM Power GmbH, all rights reserved
www.recom-power.com

## SPECIFICATIONS (measured @ $T_{AMB}$= 25°C, nominal Input and full load after warm-up time unless otherwise noted)

Typical Effiency vs. Output Current Curve

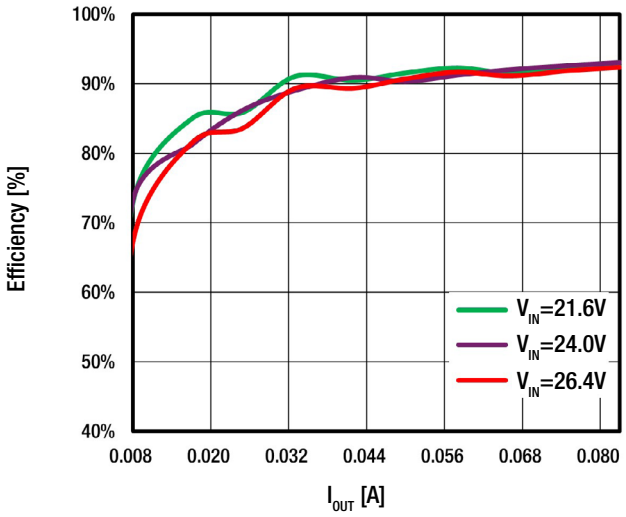



Typical Output Voltage vs. Ouput Current Curve

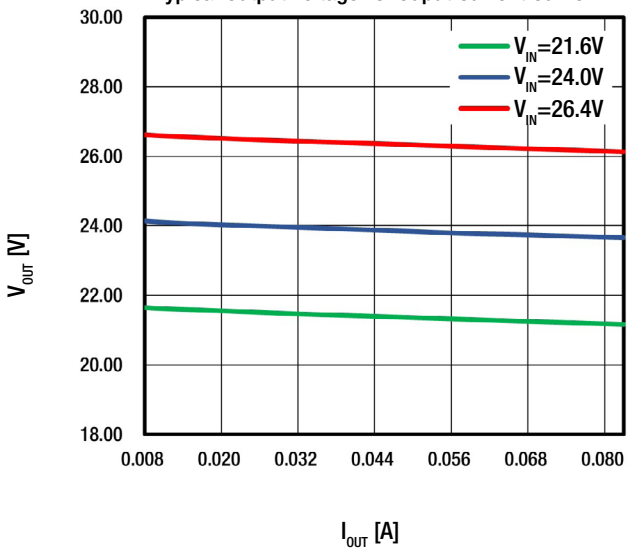



### Typical Waveform

$V_{IN}$ =24V, Full-load output voltage ripple waveform

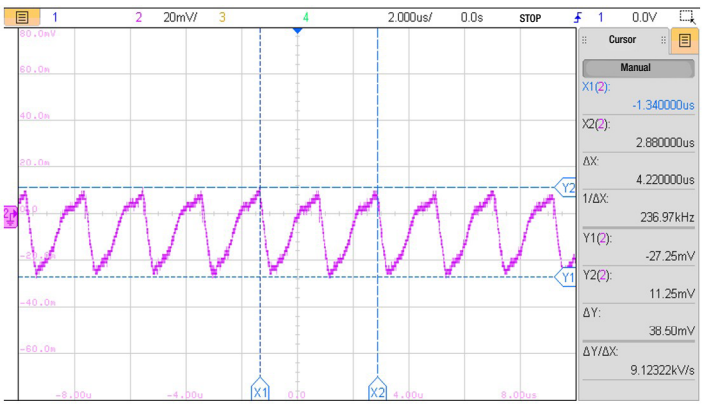


$V_{IN}$ =24V, Full load startup waveform

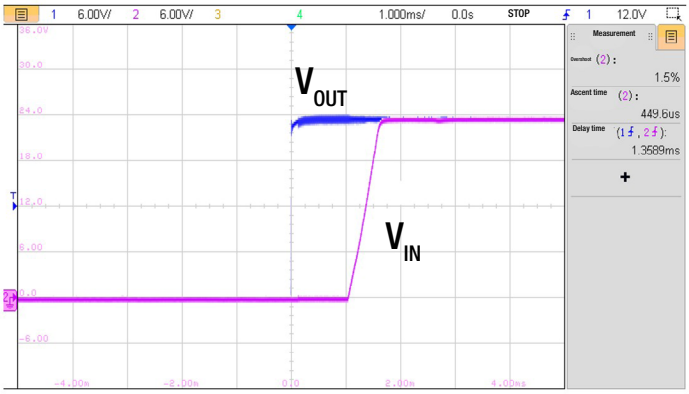


## REGULATIONS

| Parameter | Condition | Values |
|---|---|---|
| Output Accuracy | | ±2.0% Typ. |
| Line Regulation | low line to high line, full load | 1.1% of 1.2%$V_{IN}$ typ. |
| Load Regulation | 10% to 100% load, $V_{OUT}$ | ±2.0% Typ. |

## PROTECTION AND ISOLATION CAPABILITIES

| | | |
|---|---|---|
| Short Circuit Protection | | continuous, automatic recovery |
| Isolation Voltage | tested for 1 minute | 3kVDC min. |
| Insulation Grade | | functional |

copyright © RECOM Power GmbH, all rights reserved
www.recom-power.com

# DS-RVP003-RMR-004-2424-4

## 2W ◊ Unregulated Isolated Output ◊ 1:1 Input


RECOM DC/DC Converter

## ENVIRONMENT

| Parameter | Condition | Values |
|---|---|---|
| Operating Temperature Range | full load | -40°C to +85°C |

### Derating Graph

(@ Chamber and natural convection 0.1m/s)

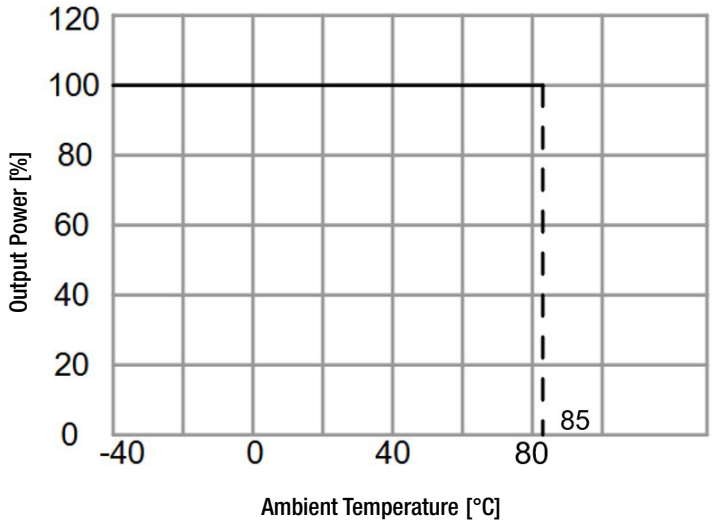



## DIMENSION & PHYSICAL CHARACTERISTICS

| Parameter | Type | Values |
|---|---|---|
| Material | PCB | FR4, (UL94 V-0) |
| Dimension (LxWxH) | | 25.4x15.24 x4.8 mm |
| Weight | | 1.40g typ. (0.003 lbs) |


## Dimension Drawing (mm)

| Pinning Information | |
|---|---|
| Pin # | Single |
| 1,2 | GND |
| 8,9 | $V_{OUT-}$ |
| 10,11 | $V_{OUT+}$ |
| 17,18 | $V_{IN}$ |

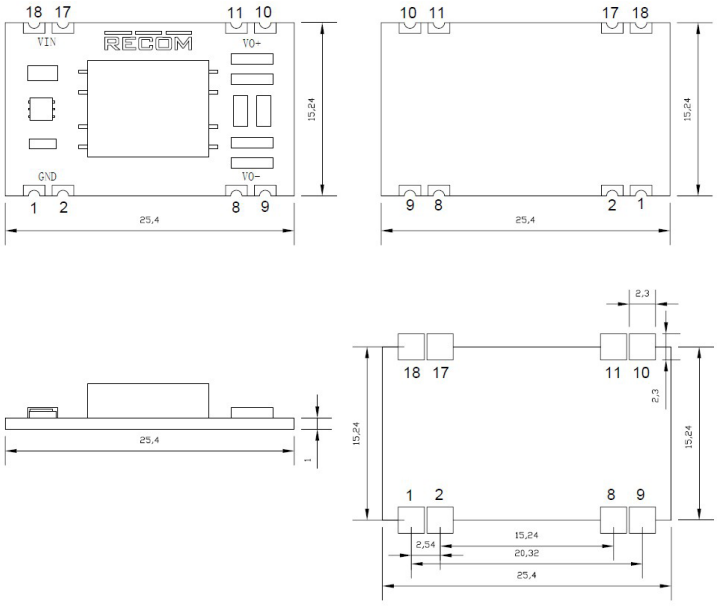


copyright © RECOM Power GmbH, all rights reserved
www.recom-power.com

## SCHEMATIC

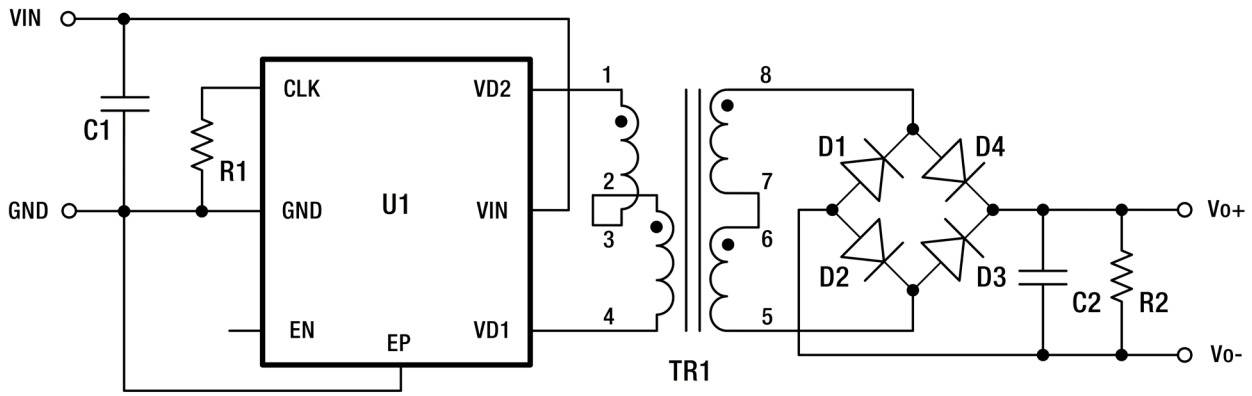


## BOM

| Component Designator | Description | Package | Manufacturer Part Number | Manufacturer |
|---|---|---|---|---|
| C1 | 1uF/50V-X7R | 0805 | CC0805KKX7R9BB105 | YAGEO |
| C2 | 4.7uF/50V-X5R | 0805 | CC0805KKX5R9BB475 | YAGEO |
| R1 | NC | - | - | - |
| R2 | 24KΩ±1% | 0805 | 0805W8F2402T5E | UNI-ROYAL |
| D1,D2,D3,D4 | 60V/1A | SOD-123 | MBRX160 | MDD |
| U1 | - | DFN2x2 | RVP003 | RECOM |
| TR1 | - | SMD | RMR-004 | RECOM |

The product information and specifications may be subject to changes even without prior written notice.The product has been designed for various applications; its suitability lies in the responsibility of each customer. The products are not authorized for use in safety-critical applications without RECOM's explicit written consent. A safety-critical application is an application where a failure may reasonably be expected to endanger or cause loss of life, inflict bodily harm or damage property. The applicant shall indemnify and hold harmless RECOM, its affiliated companies and its representatives against any damage claims in connection with the unauthorized use of RECOM products in such safety-critical applications.

copyright © RECOM Power GmbH, all rights reserved
www.recom-power.com